# MULTIMODE 1X2 THIN FILM OPTICAL COUPLER

DiCon's Multimode 1x2 Thin Film Optical Coupler utilizes a thin film filter to tap off light from an optical signal. Thin film optical filters have the advantage in multimode fiber applications because they have a stable tap ratio not subject to changes in mode distribution, unlike fused fiber optic couplers.



### **FEATURES**

- Stable Tap Ratio
- Ideal for Multimode Fiber Applications
- Test to Telcordia GR-1221

### **APPLICATIONS**

DiCon's Multimode Thin Film Optical Coupler is for applications where it is desired to split an optical signal into two paths.



# MULTIMODE 1X2 THIN FILM OPTICAL COUPLER


### SPECIFICATIONS<sup>1</sup>

PARAMETER		RATING	
Coupler Type		Thin Film	
Tap Configuration		1x2	
Insertion Loss,		C to P1	0.8 dB max.
5% Tap Ratio <sup>2</sup>		C to P2	18 dB max.
Insertion Loss,		C to P1	1.0 dB max.
10% Tap Ratio <sup>2</sup>		C to P2	12 dB max.
Insertion Loss,		C to P1	1.8 dB max.
25% Tap Ratio <sup>2</sup>		C to P2	7.2 dB max.
Insertion Loss,		C to P1	2.8 dB max.
40% Tap Ratio <sup>2</sup>		C to P2	5 dB max.
Insertion Loss,		C to P1	3.6 dB max.
50% Tap Ratio <sup>2,3</sup>		C to P2	3.6 dB max.
Back	50 µm	-25 dB max.	
Reflection	62.5 µm	-20 dB max	
Optical Power <sup>4</sup>		300 mW max.	
Operating Temperature		0 to 50 °C	
Storage Temperature		-20 to 70 °C	
Fiber Type		Multimode	


- 1. All specifications at room temperature, without connectors
- 2. Tap ratio is a nominal value of output power divided by input power. Actual insertion loss is specified by the insertion loss specification.
- 3. Dual band 850 nm & 1310 nm adds 0.20 dB
- 4. High power version available. Contact DiCon for details.

#### MECHANICAL DIMENSIONS

(Units: mm)

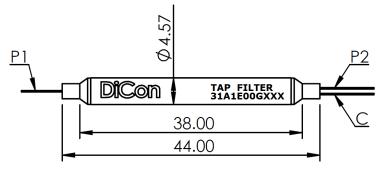

### ORDERING INFORMATION

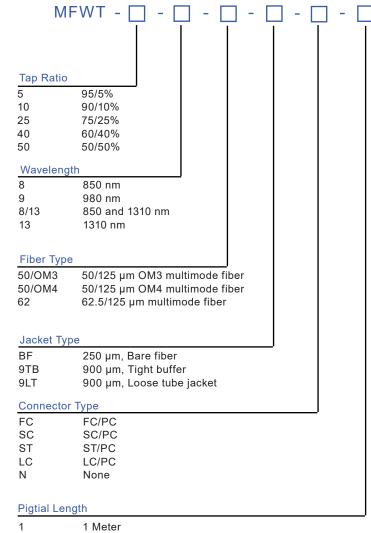

1 1 Meter X Specify X meters