


MEMS 192X192 OPTICAL SWITCHING SYSTEM

OSS Model, Single Mode Fiber, Network Grade

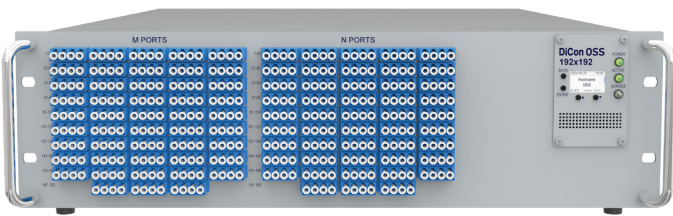

DiCon’s **Optical Switching System (OSS)** is an all-optical non-blocking cross-connect switch. This rack-mount device is designed with DiCon’s proprietary 3D MEMS mirror technology and delivers industry-leading optical performance. The unit works without any position sensor or feedback loop, and the optical signals can pass through the equipment without any observable dithering artifacts. The **OSS** can switch repeatedly with great accuracy and maintain long-term connectivity with superior stability even when there is no optical signal in the fiber.

The chassis is compact, taking minimal rack space. It is also lightweight and can be picked up easily for installation. The **OSS** comes with multiple control interfaces so authorized administrators can automate network management and set user permissions in a Software Defined Network (SDN). This product can be ordered in standard simplex or duplex configurations, and customized port arrangements are available upon request. Optical power monitors and attenuators can be added to each path as options.

Key Features

- Market Leading Performance with Recognized Reliability
- Low Loss with High Stability & No Dithering Artifacts
- Compact, Lightweight, Easy to Transport
- Switches Fast & Consumes Low Power
- Operates Bi-Directionally & Works with Dark Fibers
- Supports Software Defined Networks

Applications

- Optical Network Management
- Quantum Communications
- Data Center Interconnect
- AI (Artificial Intelligence) Networks
- LLM (Large Language Models) Machine Training
- Cyber Security & Monitoring
- Network Test Automation

ORDERING INFORMATION

OSS - N - - - 9 - - - -

Grade	
N	Network
Configuration	
S192x192	Simplex 192x192
SMxN	Simplex (M, N≤192)
D192	Duplex 192 Ports
D#	Duplex (#≤192)
Function	
Simplex	S Matrix Switch Only
	SA VOA Only
	MS M Side Power Monitor
	MSA M Side Power Monitor & VOA
	SN N Side Power Monitor
	SAN N Side Power Monitor & VOA
Duplex	MSN Both Sides Power Monitor
	MSAN Both Sides Power Monitor & VOA
	D Matrix Switch Only
	DA VOA Only
	DP Power Monitor (B Ports / Outputs)
	DAP Power Monitor & VOA (B Ports / Outputs)
Fiber Type	
9	9/125 μm SMF
*Other fiber options available upon request	
Test Wavelength	
O	1310 nm
C	1550 nm
L	1590 nm
*Use "m" to add multiple wavelengths. E.g., O/C or O/C/L	
Chassis Type	
3U	3U
4U	4U
6U	6U
*Please consult DiCon **See "Mechanical Specifications"	
Power	
A1	AC 100-240V Single
D1	DC -48V Single
A2	AC 100-240V Redundant
D2	DC -48V Redundant
Bulkhead Connector Type	
LC	LC/UPC
LC/APC	LC/APC
RLC	LC/UPC on Removable Panel
RLC/APC	LC/APC on Removable Panel
HLC	High Density LC/UPC
HLC/APC	High Density LC/APC
M8F	MTP-8 Female APC
M8M	MTP-8 Male APC
M12F	MTP-12 Female APC
M12M	MTP-12 Male APC
M24F	MTP-24 Female APC
M24M	MTP-24 Male APC
*Other connector types are available upon request	
Connector Location	
F	Front
R	Rear

## OSS Model, Single Mode Fiber, Network Grade

## ELECTRICAL SPECIFICATIONS

Power Consumption*	< 55W Steady State < 65W at Startup
Power Supply Options	Redundant Power Supply, 100-240 VAC or -48 VDC
Network Interface Card	RJ45 Dual Redundant Gigabit Ethernet
SDN & Automation Interfaces	REST API, NETCONF, SNMPv3, TL1, Web GUI, RS232, gNMI

## ENVIRONMENTAL SPECIFICATIONS

## MECHANICAL SPECIFICATIONS

Chassis Width	483 mm (19")
Chassis Depth*	435 mm (17") 559 mm (22") 762 mm (30") 889 mm (35") 1016 mm (40")
Chassis Height	3U (with HD LC)

1. Measured separately for each Test Wavelength at room temperature
2. Measured with 3-jumper method or equivalent. See TIA/EIA 526-7
3. Over 100 cycles
4. 1 Hz sampling rate for 15 min
5. Met by design, not measured
6. Test Wavelength +/-20 nm
7. Optical transition time for all ports switching concurrently, not including command processing overhead
8. 98th percentile of optical connections; defined as the average +2 standard deviations
9. Requires N side Power Monitoring
10. Corresponds to accuracy using Constant Attenuation Mode. Both Constant Power Mode and Relative Attenuation Mode will have better accuracy due to Closed-Loop feedback

