


# MEMS MULTI-MODE 1xN OPTICAL SWITCH

## WITH EXTERNAL PCB

DiCon's MEMS Multi-mode 1xN Switch provides channel selection between a single input fiber and N output fibers. At the core of the switch is DiCon's proprietary MEMS chip; an electrostatically driven mirror implemented using single-crystalline silicon and a stiction-free design. The mirror is capable of rotating on two axes, allowing the input light to be redirected back to any desired output in a 2D plane. The switch is bi-directional and can be used as a Nx1 selector switch.

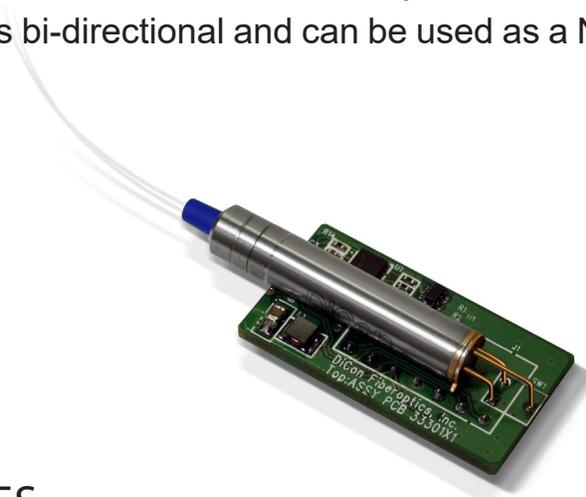

## FEATURES

- Drop-in Replacement for DIP Option
- Proven MEMS Durability and Reliability
- Compact Form Factor
- Fast Switching Time
- TTL Parallel or I<sup>2</sup>C Serial Control Interface
- Qualified to GR-1221

## APPLICATIONS

- Optical Communications
- Fiber Sensing
- Bio-medical Instrumentation
- Video Distribution



# MEMS MULTI-MODE 1XN OPTICAL SWITCH WITH EXTERNAL PCB

## OPTICAL SPECIFICATIONS<sup>1,2</sup>

PARAMETER		RATING
Insertion Loss <sup>3,4</sup>	1x2, 1x4	1.0 dB max.
	1x6, 1x8	1.2 dB max.
Crosstalk <sup>5</sup>	50 $\mu$ m	-25 dB max.
	62.5 $\mu$ m	-20 dB max.
Back Reflection		-20 dB max.
TDL		0.30 dB max.
Repeatability <sup>6</sup>		0.02 dB max.
Optical Power		500 mW max.
Durability		10 <sup>9</sup> cycles min.
Switching Time	1x2, 1x4	20 ms max.
	1x6, 1x8	30 ms max.
Operating Temp		-5 to 70°C
Storage Temp		-40 to 85°C
Fiber Type		Multi-mode, Bare Fiber

- Specifications are without connectors.
- Aligned transparent to channel 1.
- IL is measured at CWL, 23°C.
- IL is for single-band. Dual-band adds 0.3dB.
- Optical off state isolation is the same as crosstalk.
- Repeatability is defined within 100 cycles.

## ORDERING INFORMATION


MSP -  -  -  -  -  -

<b>Product Code</b>	
MSP	MEMS Switch with PCB
<b>Switch Configuration</b>	
1xN	1xN Switch
<i>Specify N<math>\leq</math>8 for 50<math>\mu</math>m or N<math>\leq</math>4 for 62.5<math>\mu</math>m</i>	
<b>Control Interface</b>	
TTL	TTL
I2C	I2C
<b>Wavelength Range</b>	
8	850 nm only
9	980 nm only
8/13	850 & 1310 nm
<b>Fiber and Jacket Type</b>	
50/BF	50 $\mu$ m core, bare fiber
62/BF	62.5 $\mu$ m core, bare fiber
<b>Connector Type</b>	
FC/SPC	FC/SPC
FC/APC	FC/APC
N	NONE
<i>Also Available: SC, SC/UPC, SC/APC, ST, ST/UPC, LC</i>	
<b>Pigtail Length</b>	
1	1 Meter
X	Specify X Meters
<i>Tolerance is +/- 0.05 m</i>	


## MECHANICAL DIMENSIONS

(Units: mm)

Top View

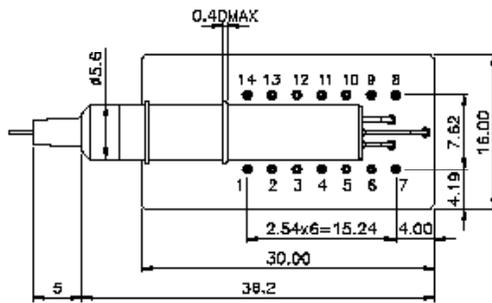

End View



## ELECTRICAL SPECIFICATIONS

PARAMETER	RATING
Latching Type	non-latching
Control Type	I2C and TTL
Vcc Voltage	12 VDC
Power Consumption	170 mW max.
Vcc Damage Threshold	15 VDC