


MEMS MULTI-MODE 1XN OPTICAL ARRAY SWITCH

DiCon's MEMS Multi-mode 1xN Optical Array Switch houses and controls up to 16 MEMS 1xN multi-mode optical switches through a single control interface. The switches are bi-directional and can also be used in the reverse direction as an Nx1 selector switch.

DiCon's optical switches operate by collecting and collimating light from the input fiber, and then reflecting this light off of an ultra-stable and reliable, 2-axis DiCon MEMS mirror, which precisely directs the light to the requested output fiber. The input and output fibers aligned to the MEMS mirror using a single ferrule, resulting in an extremely compact, robust design. The MEMS mirror utilizes DiCon's advanced MEMS technology developed over many years at DiCon, and tested and proven in the telecommunications, aerospace and other demanding applications.

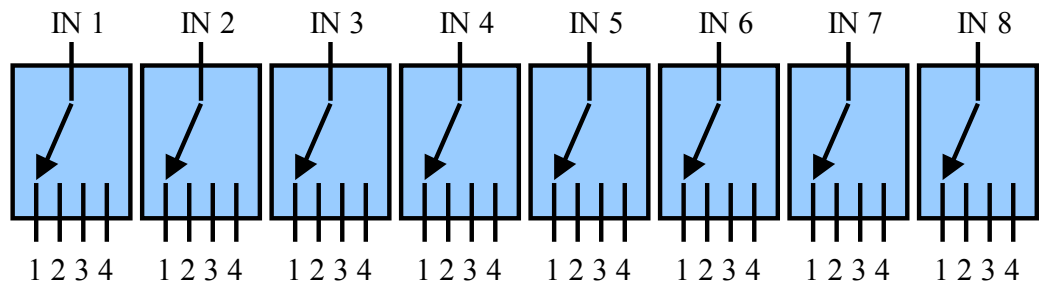

FEATURES

- High Reliability
- Proven MEMS Technology
- Lifetime > 1 Billion Switch Cycles
- Controls up to 16 MEMS Optical Switches

APPLICATIONS

- Fiber Sensing
- Resource Sharing
- Test & Measurement



MEMS MULTI-MODE 1XN OPTICAL ARRAY SWITCH

OPTICAL SPECIFICATIONS¹

PARAMETER		RATING
Insertion Loss ^{2,3}	1x2, 1x4	1.0 dB max.
	1x8	1.2 dB max.
Crosstalk ⁴	50 μ m	-25 dB max.
	62.5 μ m	-20 dB max.
Back Reflection		-20 dB max.
Switching Time		30 ms max.
TDL		0.40 dB max.
Repeatability ⁵		0.02 dB max.
Durability		10 ⁹ cycles min.
Optical Power		500 mW max.
Operating Temp		-5 to 70°C
Storage Temp		-40 to 85°C
Fiber Type		Multi-mode

- Specifications are without connectors.
- IL is measured at specific wavelength, 23°C.
- IL is for single-band. Dual-band adds 0.3 dB.
- Power off isolation is same as crosstalk.
- Repeatability is defined after 100 cycles.

ORDERING INFORMATION

MS5 - M/1xN - - - - -

Product Code

MS5 MEMS Switch

Switch Configuration

M/1xN M 1xN Array Switch
(M \leq 16 switches
N \leq 8 for 50 μ m Fiber,
N \leq 4 for 62.5 μ m Fiber)

Control Interface

I2C I²C
RS2 RS232

Wavelength Range

8 850 nm
9 980 nm
8/13 850 & 1310 nm

Fiber and Jacket Type

50/BF 50 μ m core, bare fiber
62/BF 62.5 μ m core, bare fiber
50/LT 50 μ m core, loose tube
62/LT 62.5 μ m core, loose tube

Connector Type

FC FC/PC
LC LC/PC
SC SC/PC
ST ST/PC
N NONE



Other connectors available upon request

Pigtail Length

1 1 Meter
X Specify X Meters

Tolerance is +/- 10 cm

MECHANICAL DIMENSIONS (Units: mm)

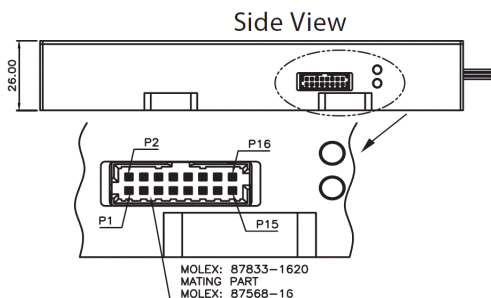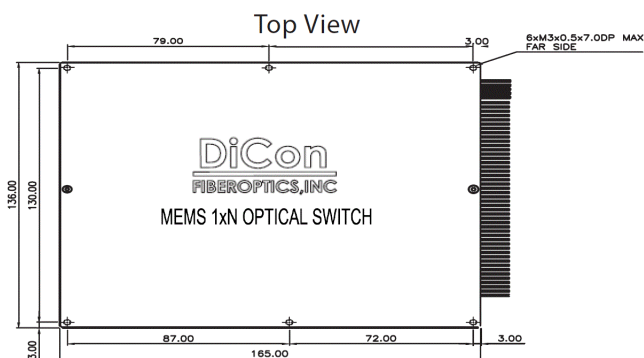

ELECTRICAL SPECIFICATIONS

PARAMETER	RATING
Latching Type	non-latching
Control Type	I ² C or RS232
Vcc Voltage	12 VDC
Power Consumption	1 W max.
Connector Type	Molex 87833-1620