


RS-232 CABLE ASSEMBLY KIT

DiCon's RS-232 Cable Assembly Kit is comprised of a ribbon cable, AC power adapter, RS-232 cable. The 16 pin ribbon cable interfaces the 16 pin Molex connector on with either the switch module or the control board. The other end of the cable splits the power and RS-232 controls lines between the AC adapter, which supplies 12 VDC to the device and the female DB9 connector for RS-232 control lines.

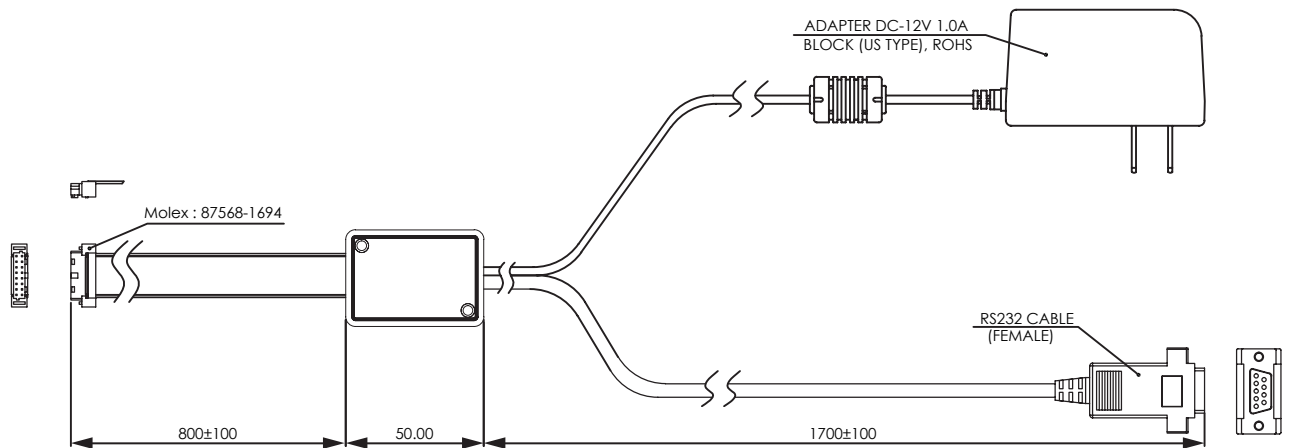

RS-232 CABLE ASSEMBLY KIT

CABLE ASSEMBLY KIT INCLUDES

- 16 Pin Male Molex Connector (87568-1694)
- Universal AC Power Adapter
- RS-232 Cable with Female DB9 Connector

AC ADAPTER PLUG TYPE OPTIONS



AU



UK



EU



US

ORDERING INFORMATION

RCK - - -

Product Code	
RCK	RS-232 Cable Kit

DC Voltage Requirement	
12	12 VDC <i>Switches and tunable filters</i>
5	5 VDC <i>MEMS VOA, DPE or tap detector module</i>

Product Type	
MSM	MEMS Switch Module <i>Size 2, 3 or 5 with RS-232 control</i>
3D	MEMS 3D Matrix Switch Module <i>Part numbers starting with MN4, MN6 or MN8 with RS-232 control</i>
MTF	MEMS Tunable Filter <i>With control or evaluation board</i>
DPE	DPE, MEMS VOA, Tap Detector Module <i>5 VDC modules based on the DPE board (Part number starting with: MA, ME, MD, TDE)</i>
VX	VX Stepper Motor Switch Module <i>VX 1xN or 2xN modules with RS-232 control</i>

AC Adapter Plug Type	
AU	AU Type
EU	EU Type
UK	UK Type
US	US Type

ELECTRICAL SPECIFICATIONS

PARAMETER	RATING
Latching Type	Non-latching
Control Type	RS232
Input Voltage	100 to 240 VAC
Connector Type	9 Pin DB9