

MEMS VARIABLE OPTICAL ATTENUATOR

GP800 Model, Singlemode Fiber




DiCon's **MEMS Variable Optical Attenuator (VOA)** allows for a precise amount of attenuation to be added to an optical path in singlemode fiber applications.

- Industry proven MEMS technology
- Reliable, long life design
- High density to minimize rack space

Applications

- Optical Communications
- Fiber Sensing
- DWDM Gain Equalization
- Bio-medical Instrumentation

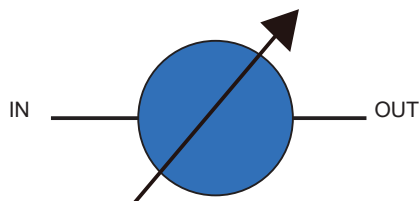

ORDERING INFORMATION

GP800 - - A - - - 9 - - - S - - N -

Chassis Type

1U 1U
2U 2U
4U 4U

**Please consult DiCon*

Device Type

A MEMS VOA

Configuration

X # of Channels

Alignment Type

T Transparent
P Opaque

Fiber Type

9 9/125 μ m SMF

**Other fiber options are available upon request*

Test Wavelength

O 1310 nm
C 1550 nm
L 1590 nm

**Use "/" to add multiple wavelengths (E.g., O/C or O/C/L)*

Attenuation Range

30 30 dB Attenuation
X Specify X dB min.

**Other attenuation levels are available upon request*

WDL Type

S Superior Broad Band Flatness

Connector Type

FC FC/UPC
FC/APC FC/APC
LC LC/UPC
LC/APC LC/APC
SC SC/UPC
SC/APC SC/APC

**Other connector types are available upon request*

Connector Key Orientation

N None

Connector Location

F Front
R Rear

MEMS VARIABLE OPTICAL ATTENUATOR

GP800 Model, Singlemode Fiber

OPTICAL SPECIFICATIONS¹

Operating Wavelength		1260 to 1680 nm
Excess Loss ²		0.6 dB max. ³
WDL ⁵	0 to 5 dB	0.3 dB max. ⁴
	5 to 10 dB	0.5 dB max. ⁴
	10 to 20 dB	0.8 dB max. ³
PDL	0 to 15 dB	0.15 dB max. ⁴
	15 to 20 dB	0.2 dB max. ³
Tuning Resolution		0.01 dB max.
Back Reflection		-50 dB max.
Response Time ⁶		2 ms max.
Repeatability ⁷		0.1 dB max.
Durability ⁸		1 Billion Cycles min.
Optical Power ⁸		500 mW max.
Fiber Type		Singlemode

1. All specifications are measured separately at room temperature for each Test Wavelength

2. Measured with 3-jumper method or equivalent (See TIA/EIA 526-7)

3. Multi-band adds 0.2 dB

4. Multi-band adds 0.1 dB

5. WDL is defined within Test Wavelength ± 20 nm

6. Optical transition time; the actual processing delay to execute the attenuation command is longer

7. Repeatability is defined over 100 cycles

8. Met by design, not measured

ELECTRICAL SPECIFICATIONS

Power Supply	100-240 VAC, 50/60 Hz
Connectors	RJ45 (Ethernet) DB9 (RS232) USB-C (Service)
Control Interface	Web GUI, SSH, RS232, REST API, Telnet


ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	0 to 50°C, < 85% RH
Storage Temperature	-40 to 70°C, < 40% RH

MECHANICAL SPECIFICATIONS

Chassis Width	483 mm (19")
Chassis Depth	435 mm (17")
Chassis Height	1U : 44 mm (1.7") 2U : 88 mm (3.5") 4U : 177 mm (7.0")

Front View



Rear View

