

MEMS DYNAMIC POWER EQUALIZER

GP800 Model, Singlemode Fiber





DiCon's **MEMS Dynamic Power Equalizer (DPE)** combines a MEMS VOA with a Tap Detector. This allows the optical power after the VOA to be monitored and the attenuation of the VOA to be adjusted in order to maintain a specified power level.

- Constant Power Mode
- Constant Attenuation Mode
- Proven MEMS Durability and Reliability
- Compact Form Factor
- Excellent Output Accuracy
- Wide Attenuation Range
- Low Insertion Loss

Applications

- Optical Communications
- Fiber Sensing
- DWDM Gain Equalization
- Bio-medical Instrumentation

Operating Principle

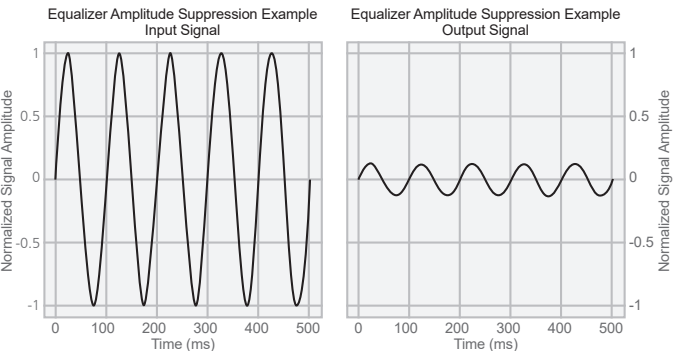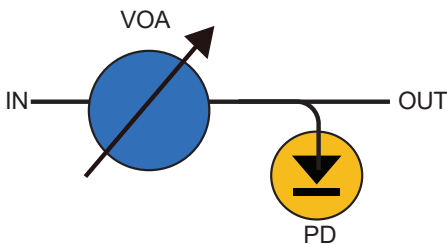

ORDERING INFORMATION

GP800 - - E - - - 9 - - - S - - N -

Chassis Type	
1U	1U
2U	2U
4U	4U
<i>*Please consult DiCon</i>	
Device Type	
E	MEMS DPE
Configuration	
X/Y	# of Channels / Tap Ratio %
Alignment Type	
T	Transparent
P	Opaque
Fiber Type	
9	9/125 μ m SMF
<i>*Other fiber options are available upon request</i>	
Test Wavelength	
O	1310 nm
C	1550 nm
L	1590 nm
<i>*Use "/" to add multiple wavelengths (E.g., O/C or O/C/L)</i>	
Attenuation Range	
30	30 dB Attenuation
X	Specify X dB min.
<i>*Other attenuation levels are available upon request</i>	
WDL Type	
S	Superior Broad Band Flatness
Connector Type	
FC	FC/UPC
FC/APC	FC/APC
LC	LC/UPC
LC/APC	LC/APC
SC	SC/UPC
SC/APC	SC/APC
<i>*Other connector types are available upon request</i>	
Connector Key Orientation	
N	None
Connector Location	
F	Front
R	Rear

MEMS DYNAMIC POWER EQUALIZER

GP800 Model, Singlemode Fiber

OPTICAL SPECIFICATIONS^{1,2}

Operating Wavelength		1260 to 1680 nm	
Insertion Loss ³	1% Tap Ratio	0.8 dB max.	
	2%	0.9 dB max.	
	5%	1.1 dB max.	
	10%	1.3 dB max.	
Dynamic Power Range	1% Tap Ratio	-47 to 25 dBm	
	2%	-50 to 22 dBm	
	5%	-54 to 18 dBm	
	10%	-57 to 15 dBm	
Relative Power Accuracy ⁴		±0.2 dB max.	
Response Time ⁵		2 to 500 ms	
Closed Loop Bandwidth ⁶		45 Hz ⁷	
PDL ⁸	0 dB Att.	0.14 dB max.	
	< 10 dB Att.	0.2 dB max.	
	< 20 dB Att.	0.3 dB max.	
WDL	Superior Broad Band ¹⁰	< 10 dB Att. ⁸	0.5 dB max.
		< 20 dB Att. ⁹	0.7 dB max.
Back Reflection		-50 dB max.	
Tuning Resolution		0.01 dB	
Durability ¹¹		1 Billion Cycles min.	
Optical Power ¹¹		500 mW max.	
Fiber Type		Singlemode	

1. All specifications are measured separately at room temperature for each Test Wavelength
2. DiCon recommends the use of external detectors or a dynamic power equalizer module for applications requiring absolute attenuation accuracy
3. Measured with 3-jumper method or equivalent (See TIA/EIA 526-7)
4. For closed-loop operation when
 - output power > -27 dBm for 1% tap ratio
 - output power > -30 dBm for 2% tap ratio
 - output power > -34 dBm for 5% tap ratio
 - output power > -37 dBm for 10% tap ratio
5. The averaging time for power measurements and the control loop interval for the built-in Variable Optical Attenuator (VOA)
6. The frequency range where the system can suppress input power fluctuations by over 50%
7. When input power > -30 dBm
8. Adds 0.1 dB for dual-band operation
9. Adds 0.3 dB for dual-band operation
10. Maximum variation within the wavelength range of Test Wavelength ±20 nm
11. Met by design, not measured

ELECTRICAL SPECIFICATIONS

Power Supply	100-240 VAC, 50/60 Hz
Connectors	RJ45 (Ethernet) DB9 (RS232) USB-C (Service)
Control Interface	Web GUI, SSH, RS232, REST API, Telnet


ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	0 to 50°C, < 85% RH
Storage Temperature	-40 to 70°C, < 40% RH

MECHANICAL SPECIFICATIONS

Chassis Width	483 mm (19")
Chassis Depth	435 mm (17")
Chassis Height	1U : 44 mm (1.7") 2U : 88 mm (3.5") 4U : 177 mm (7.0")

Front View



Rear View

